



• TAPE (mm)

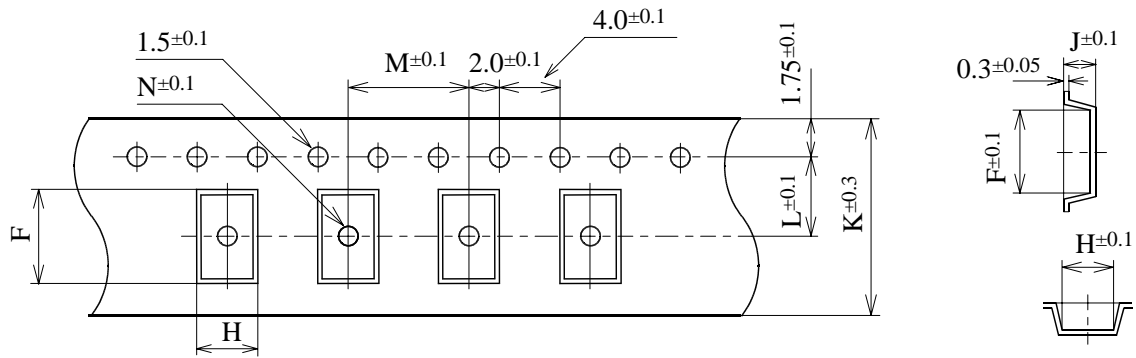

MODEL	F	H	J	K	L	M	N
TFC-2016M	2.2	1.9	0.75	8.0	3.5	4.0	1.0
TFC-2520M	2.7	2.3	1.15	8.0	3.5	4.0	1.5
TFC-3225M	3.6	2.9	1.25	8.0	3.5	4.0	1.5
TFC-4025M	4.4	2.9	1.0	12.0	5.5	4.0	1.5
TFC-5032M	5.5	3.7	1.1	12.0	5.5	8.0	1.5
TFC-6035M	6.4	3.9	1.4	12.0	5.5	8.0	1.5
TFC-7050M	7.4	5.4	1.9	16.0	7.5	8.0	1.5
TFM-1043A	11.3	4.4	4.1	24.0	11.5	8.0	1.6
TFM-1350A	13.4	5.3	5.5	24.0	11.5	8.0	1.6


• REEL (mm)

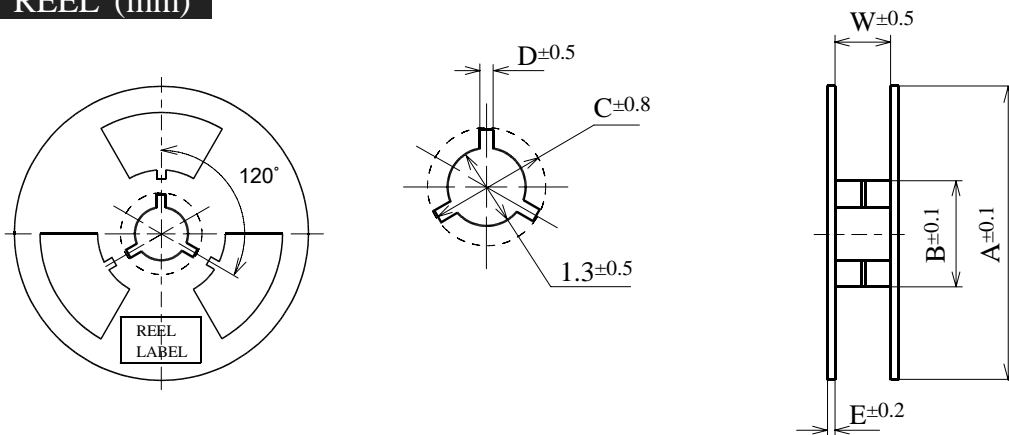


MODEL	A	B	C	D	E	W
TFC-2016M	180	60	21.0	2.0	1.2	9.0
TFC-2520M	180	60	21.0	2.0	1.2	9.0
TFC-3225M	180	80	21.0	2.0	1.2	9.0
TFC-4025M	178	80	21.0	2.5	2.0	12.4
TFC-5032M	178	80	21.0	2.5	2.0	12.4
TFC-6035M	250	80	21.0	2.5	2.0	12.4
TFC-7050M	300	100	23.0	2.5	2.0	17.65
TFM-1043A	300	80	23.0	2.5	2.0	25.5
TFM-1350A	300	80	21.0	2.5	2.0	25.5

APPROVE	DESIGN	PUBLICATION	21 / 03 / 2001	ITEM	OUTLINE AND DIMENSION ( CRYSTAL )
		REVISION			
		REVISION			
		REVISION			

● TAPE (mm)

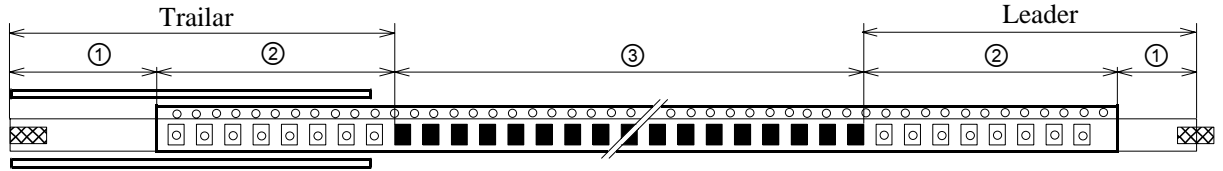


- ① Only top of tape 250min.
- ② Empty tape 150min.
- ③ Mounted the part in the tape

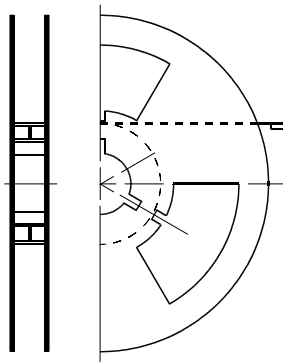

- 1) Rolling direction of taping on reel is clock-wise as above figure.  
When pulling the edge of the tape, the hole is right side.
- 2) Top of leader is fixed with the roller tape by adhesive tape
- 3) Direction of installation is above figure

● Reel Label

P/O No.	
Model	
Frequency	
Quantity	

APPROVE	DESIGNED	PUBLICATIO	21 / 03 / 2001	ITEM	OUTLINE AND DIMENSION
		REVISION			
		REVISION			
		REVISION			
				DRW.No.	TT - 052XA